

10/554382

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
11 November 2004 (11.11.2004)


PCT

(10) International Publication Number
WO 2004/098089 A1

- (51) International Patent Classification⁷: H04B 5/00, G06K 7/00
- (21) International Application Number: PCT/IB2004/050475
- (22) International Filing Date: 21 April 2004 (21.04.2004)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data: 03101168.7 29 April 2003 (29.04.2003) EP
- (71) Applicant (for all designated States except US): KONINKLIJKE PHILIPS ELECTRONICS N.V. [NL/NL]; Groenewoudseweg 1, NL-5621 BA Eindhoven (NL).
- (72) Inventors; and
- (75) Inventors/Applicants (for US only): AMTMANN, Franz [AT/AT]; Triester Strasse 64, A-1101 Vienna (AT). HARNISCH, Markus [AT/AT]; Triester Strasse 64, A-1101 Vienna (AT). KUNKAT, Holger [DE/AT]; c/o Triester Strasse 64, A-1101 Vienna (AT). POSCH, Stefan [AT/AT]; Triester Strasse 64, A-1101 Vienna (AT).
- (74) Agent: RÖGGLA, Harald; Philips Intellectual Property & Standards, Triester Strasse 64, A-1101 Vienna (AT).
- (81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.
- (84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).
- Published:
— with international search report

[Continued on next page]

(54) Title: CIRCUIT FOR CONTACTLESS DEVICE HAVING ACTIVE AND PASSIVE SEND MODES

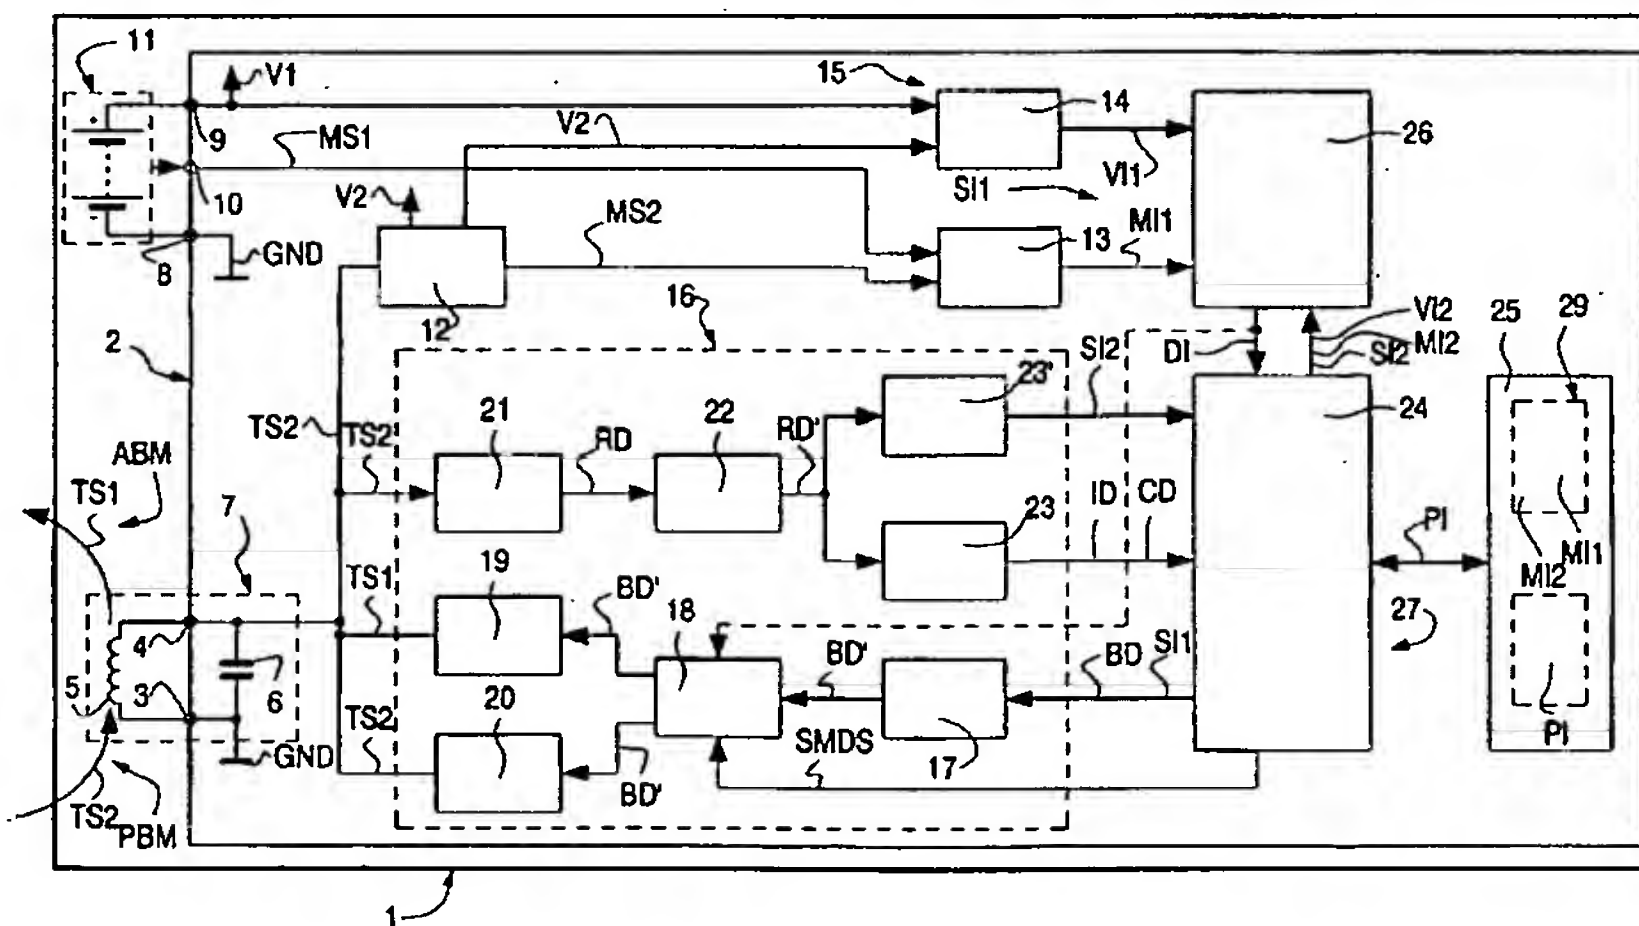

(57) Abstract: In a circuit (2) for a communication partner appliance (1) designed for contactless communication having two activatable send modes (ABM, PBM), which send modes (ABM, PBM) differ from one another with regard to their energy requirement, a determination stage (15) is provided, which is designed to determine first energy source information (SI1), which first energy source information (SI1) is characteristic of at least one parameter of at least one energy source (11, 12) serving to supply the circuit with electrical energy, and a decision stage (26) is additionally provided, which is designed to form a decision result taking account of the first energy source information (SI1) determined with the determination stage (15), which decision result influences which send mode (ABM, PBM) is to be activated in the circuit (2) of the communication appliance (1).

WO 2004/098089 A1